



CS-417 INTRODUCTION TO ROBOTICS AND INTELLIGENT SYSTEMS

Software Architectures for Robot Control

Low Level Control

- Robot H/W control Software (drivers):
 - **ROS**
 - RHeXLib
 - Player
 - Ndirect, seriald (Nomadics)
- Simulation
 - **StageROS, Gazebo**
 - RHeX SimSect?
 - Stage
 - Nclient, server
 - RD11



High Level Control

- Important when multi-tasking
- Especially in Multi-Robot settings
- Brief Historical note:
 - Subsumption Architecture (Rodney Brooks)
 - Behaviour based Architecture
 - Three Layer Architectures
 - Combining the above two plus some more 😊




Several Options

- Player/Stage (USC)
- Microsoft Robotics Developers Studio
- ROS (willow garage)
- ALLIANCE (L. Parker)
- RoboDevel/RHeXlib (U. Saranli)
- Robodaemon [RD11] (MRL product)
- CLARAty (JPL)
- CAMPOUT (JPL)
- SAPHIRA (Konolige)
- CARMEN (Thrun, Roy)
- EPICS (Junaed, J. Smith suggestion)
- Subsumption (Rodney Brooks)
- Three layer Architectures
- DCA (Christensen)
- Reid Simmons projects
- TeamBots (Balch), Mission Lab (Arkin), Ayllu (Werger), ARIA (ActivMedia)



Sense Plan Act

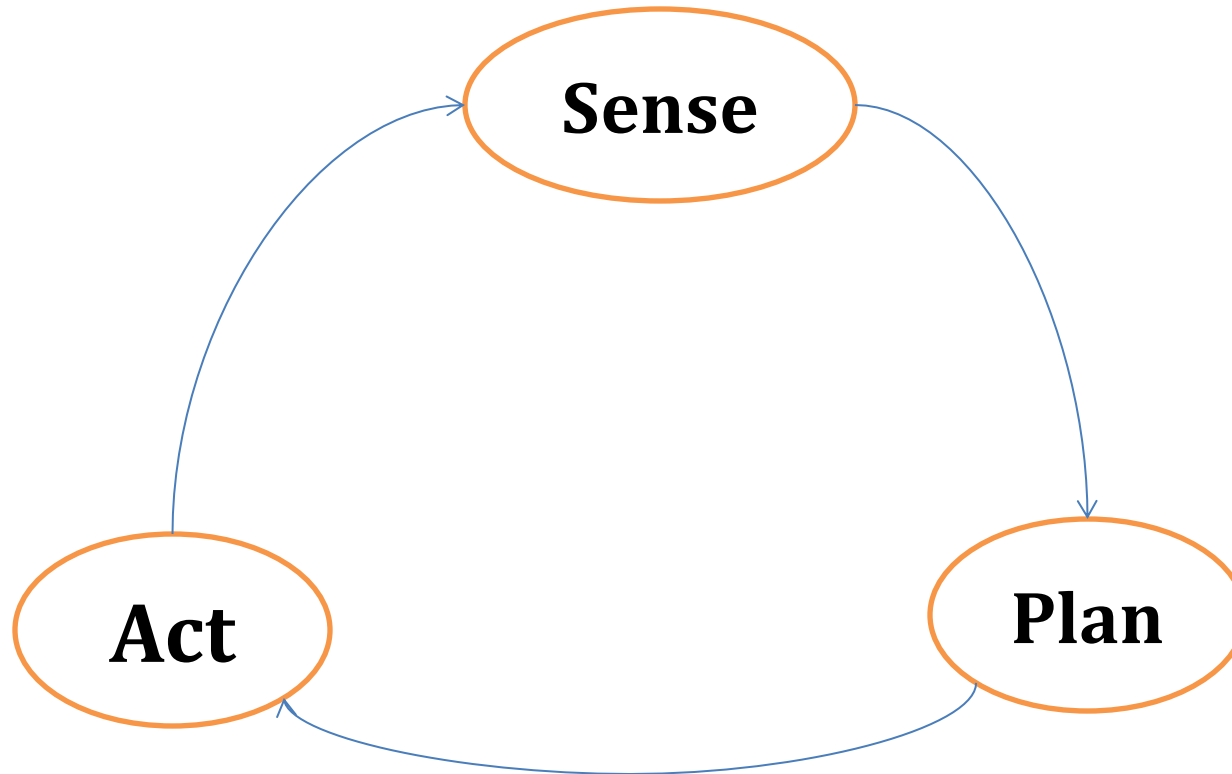

Subsumption



- The Subsumption architecture is built in layers.
- Each layer gives the system a set of pre-wired behaviours.
- The higher levels build upon the lower levels to create more complex behaviours.
- The behaviour of the system as a whole is the result of many interacting simple behaviours.
- The layers operate asynchronously.



See: <http://ai.eecs.umich.edu/cogarch0/subsump/index.html>



Subsumption

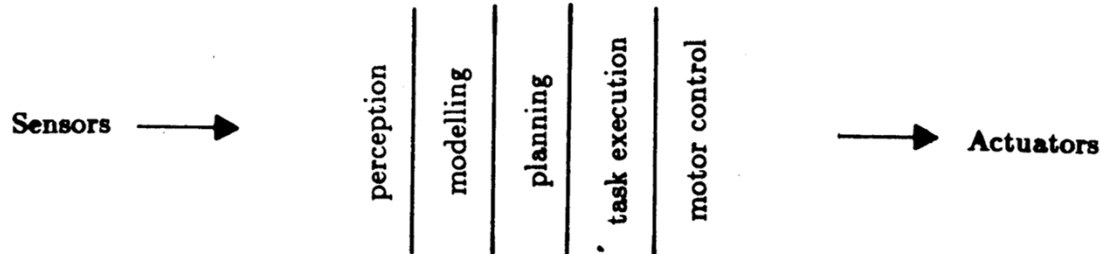


Figure 1. A traditional decomposition of a mobile robot control system into functional modules.

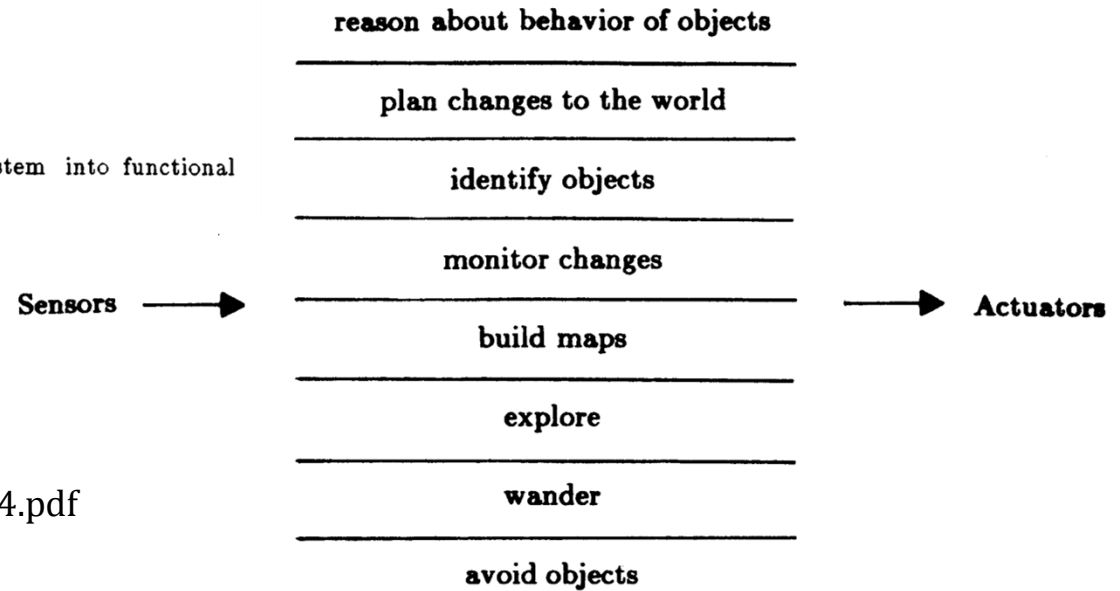


Figure 2. A decomposition of a mobile robot control system based on task achieving behaviors.

See: <http://people.csail.mit.edu/brooks/papers/AIM-864.pdf>



Three-Layer Architectures

- The Controller (low level, tight coupling)
- The Sequencer (selecting low level behaviours)
- The Deliberator (time-consuming computations)

See: <http://www.flownet.com/gat/papers/tla.pdf>



Player and Stage

- Following the bazaar/open_source model
- Player is the low level control interface
- Stage is a simulation engine (2D)
- Gazebo is a 3D simulation engine




Player

- TCP socket server
- Clients connect to the server and send/receive commands/data
- Sensor and actuator abstraction




Player

Mapping Computer



Laser scanner

Vision system



Data logging server




Robot



Robot




Robot



GUI & Debugging workstation

Player Architecture

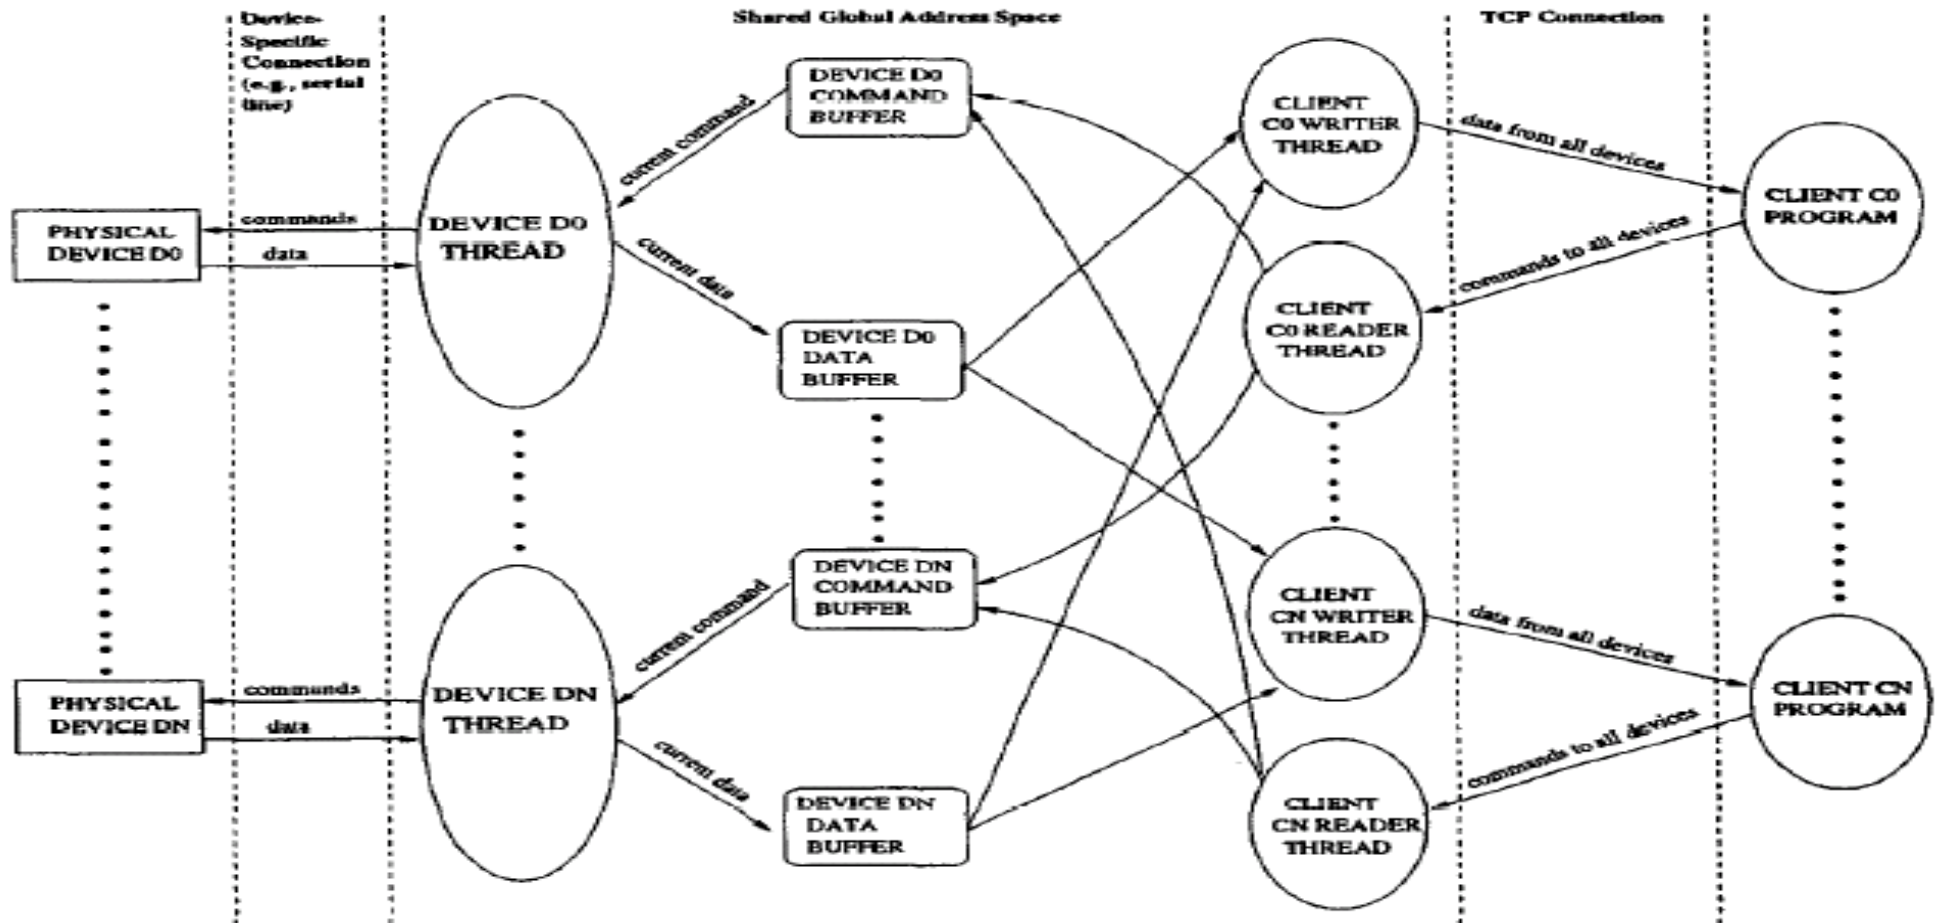

CARMEN

- Welcome to CARMEN, the Carnegie Mellon Robot Navigation Toolkit.
- CARMEN is an open-source collection of software for mobile robot control.
- CARMEN is modular software designed to provide basic navigation primitives including:
 - base and sensor control
 - logging
 - obstacle avoidance
 - localization
 - path planning
 - mapping



See: <http://carmen.sourceforge.net/>



Microsoft Robotics Developer Studio

- Concurrency and Coordination Runtime
- Decentralized Software Services
- Visual Programming Language (VPL)
- Physics based Simulation Engine
- Web-based Technology
- Not-Open Source

See: <http://msdn.microsoft.com/en-us/robotics/default.aspx>



Concurrency and Coordination Runtime (CCR)

- Concurrency and Coordination Runtime (CCR) is a managed code library, a Dynamically Linked Library (DLL), accessible from any language targeting the .NET Common Language Runtime (CLR).
 - Service-oriented applications
 - manage asynchronous operations
 - deal with concurrency
 - exploit parallel hardware and deal with partial failure.
 - The software modules or components can be loosely coupled
 - They can be developed independently and make minimal assumptions about their runtime environment and other components.




Decentralized Software Services (DSS)


- Decentralized Software Services (DSS) is a lightweight .NET-based runtime environment that sits on top of the Concurrency and Coordination Runtime (CCR):
 - Lightweight
 - state-oriented service model
 - Combines the notion of representational state transfer (REST) with a system-level approach for building high-performance, scalable applications.
 - DSS services are exposed as resources which are accessible both programmatically and for UI manipulation.
 - Integrating service isolation, structured state manipulation, event notification, and formal service composition
 - Robustness
 - Composability
 - Observability



Graphical Programming

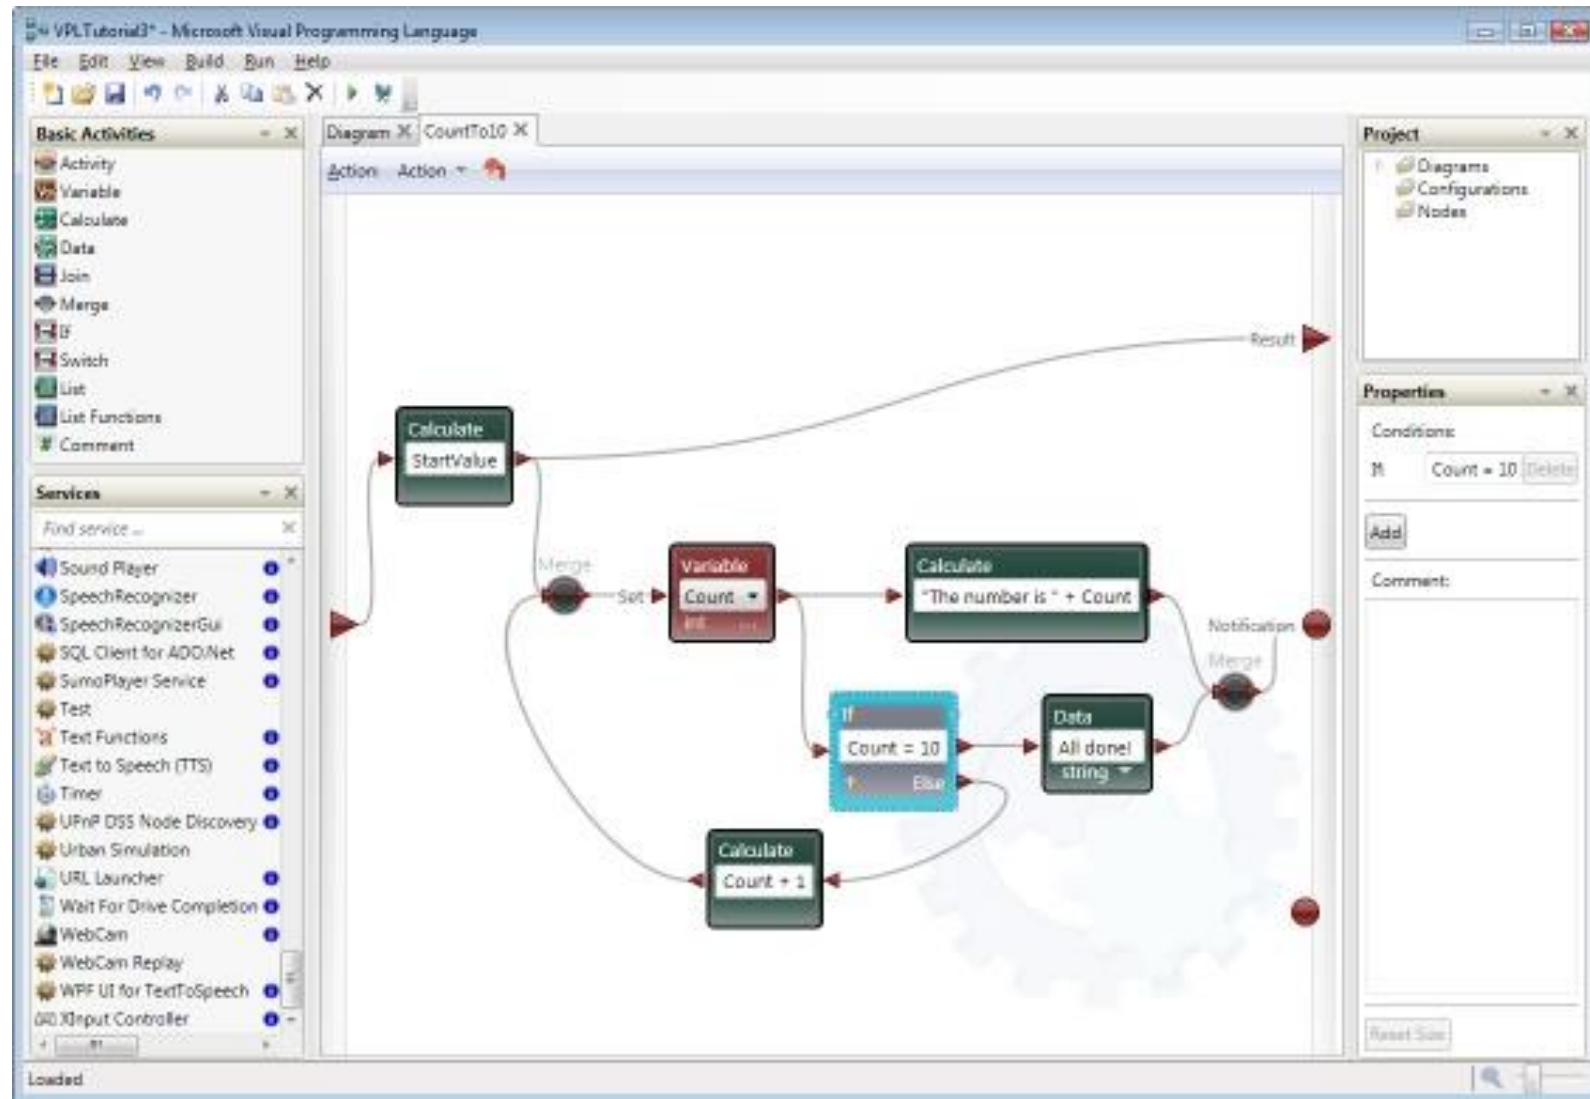


Physics based Simulation Engine

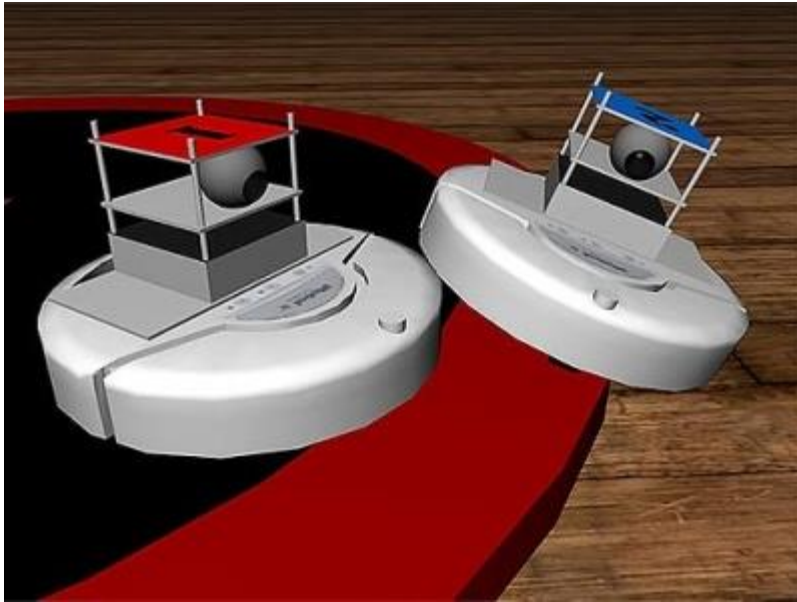

Web based Interface

Aqua in Barbados

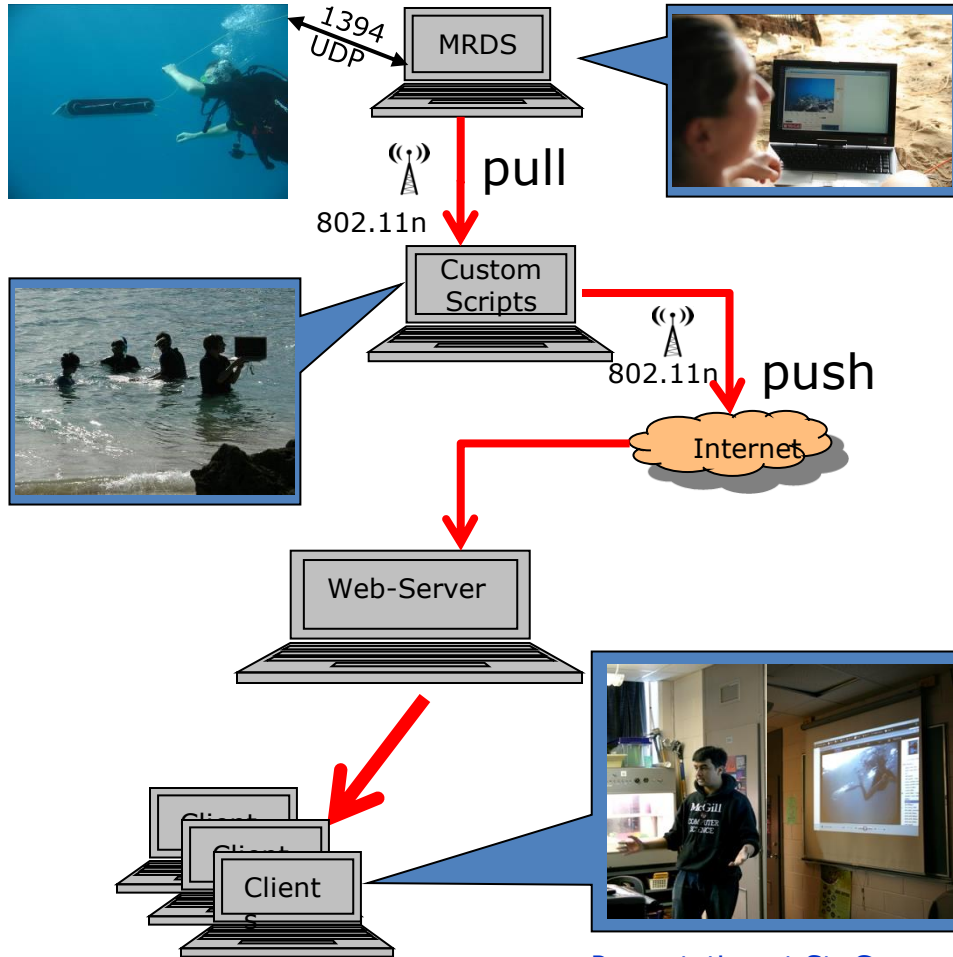

Presentation at St. Georges high school, Montreal

Underwater Swimmer

Camera

Depth (m)
0
0.14
-30

Roll	Pitch	Yaw	Leg 1	Leg 2	Leg 3
-11.06	-21.47	-6.94	1.12	1.93	1.66

LED: OFF

Battery 61.61 V

0.38	-0.00	-0.41
------	-------	-------

Leg 4 Leg 5 Leg 6

- School of Computer Science
- Centre for Intelligent Machines
- Mobile Robotics Lab
- AQUA Robot


ROS

- ROS is an open-source, meta-operating system for robots.
- It provides the services expected from an operating system, including hardware abstraction, low-level device control, implementation of commonly-used functionality, message-passing between processes, and package management. It also provides tools and libraries for obtaining, building, writing, and running code across multiple computers.
- ROS is similar in some respects to 'robot frameworks,' such as [Player](#), [YARP](#), [Orocos](#), [CARMEN](#), [Orca](#), [MOOS](#), and [Microsoft Robotics Studio](#).
- The ROS runtime "graph" is a peer-to-peer network of processes that are loosely coupled using the ROS communication infrastructure.
- ROS implements several different styles of communication, including synchronous RPC-style communication over Services, asynchronous streaming of data over Topics, and storage of data on a Parameter Server.

See: <http://www.ros.org/wiki/ROS>



ROS

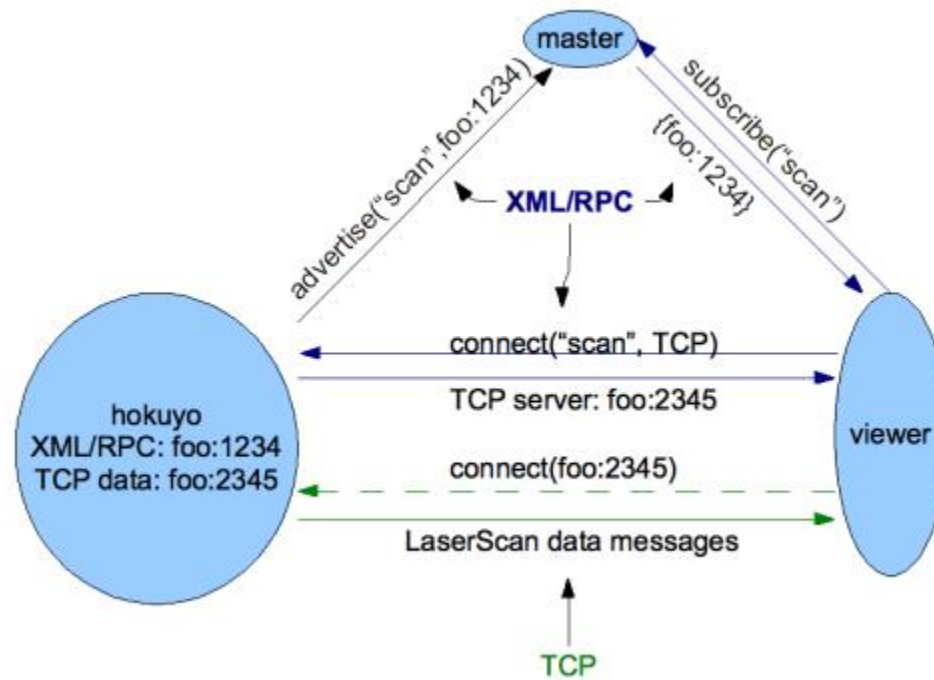

CLARAty


- A two layer architecture
- Developed at NASA/JPL
- Supporting different h/w



See: <http://claraty.jpl.nasa.gov/man/overview/index.php>




Different Mobility platforms




(a)
Skid Steering
(no steering wheels)




(b)
Tricycle
(one steering wheel)




(c)
Two-wheel steering



(d)
Partially Steerable
(e.g. Sojourner,
Rocky 7)



(e)
All wheel steering
(e.g. MER, Rocky8,
Fido, K9)

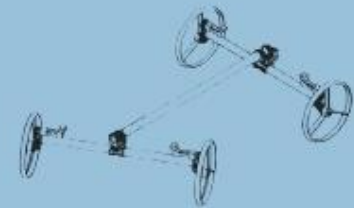

(f)
Steerable Axle
(e.g. Hyperion)

...


Approach

- Develop
 - Common data structures
 - Physical & Functional Abstractions
 - E.g. motor, camera, locomotor. Stereo processor, visual tracker
 - Unified models for the mechanism
- Putting it together
 - Start with top level goals
 - Elaborate to fine sub-goals
 - Choose the appropriate level to stop elaboration
 - Interface with abstractions
 - Abstractions translate goals to action
 - Specialize abstractions to talk to hardware
 - Hardware controls the systems and provide feedback

From: http://claraty.jpl.nasa.gov/main/overview/presentations/FY05/FY05_claraty_jtars.pdf



Two Layer Architecture

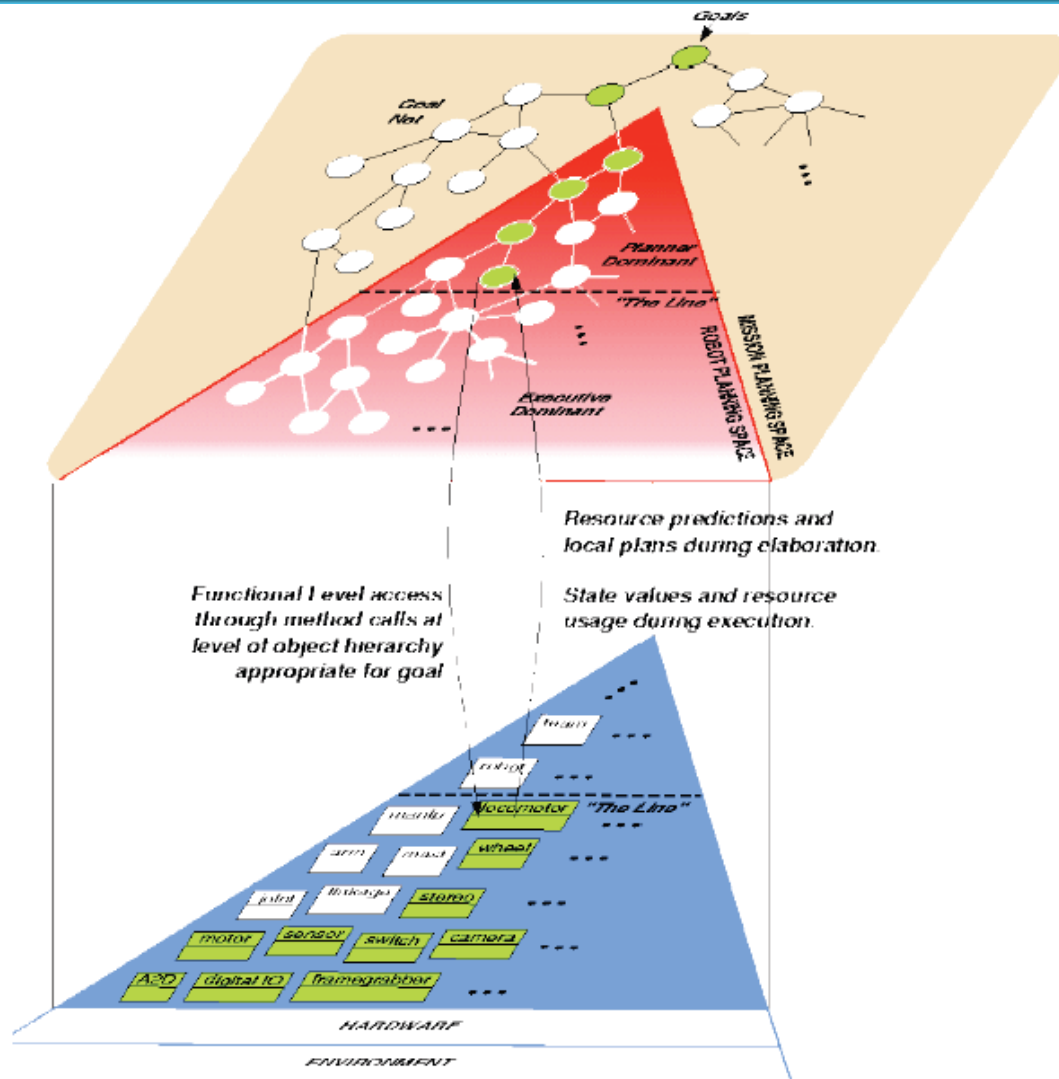

THE DECISION LAYER:

Declarative model-based
Global planning

INTERFACE:


Access to various levels
Commanding and updates

THE FUNCTIONAL LAYER:

Object-oriented abstractions
Autonomous behavior
Basic system functionality

Adaptation to a system



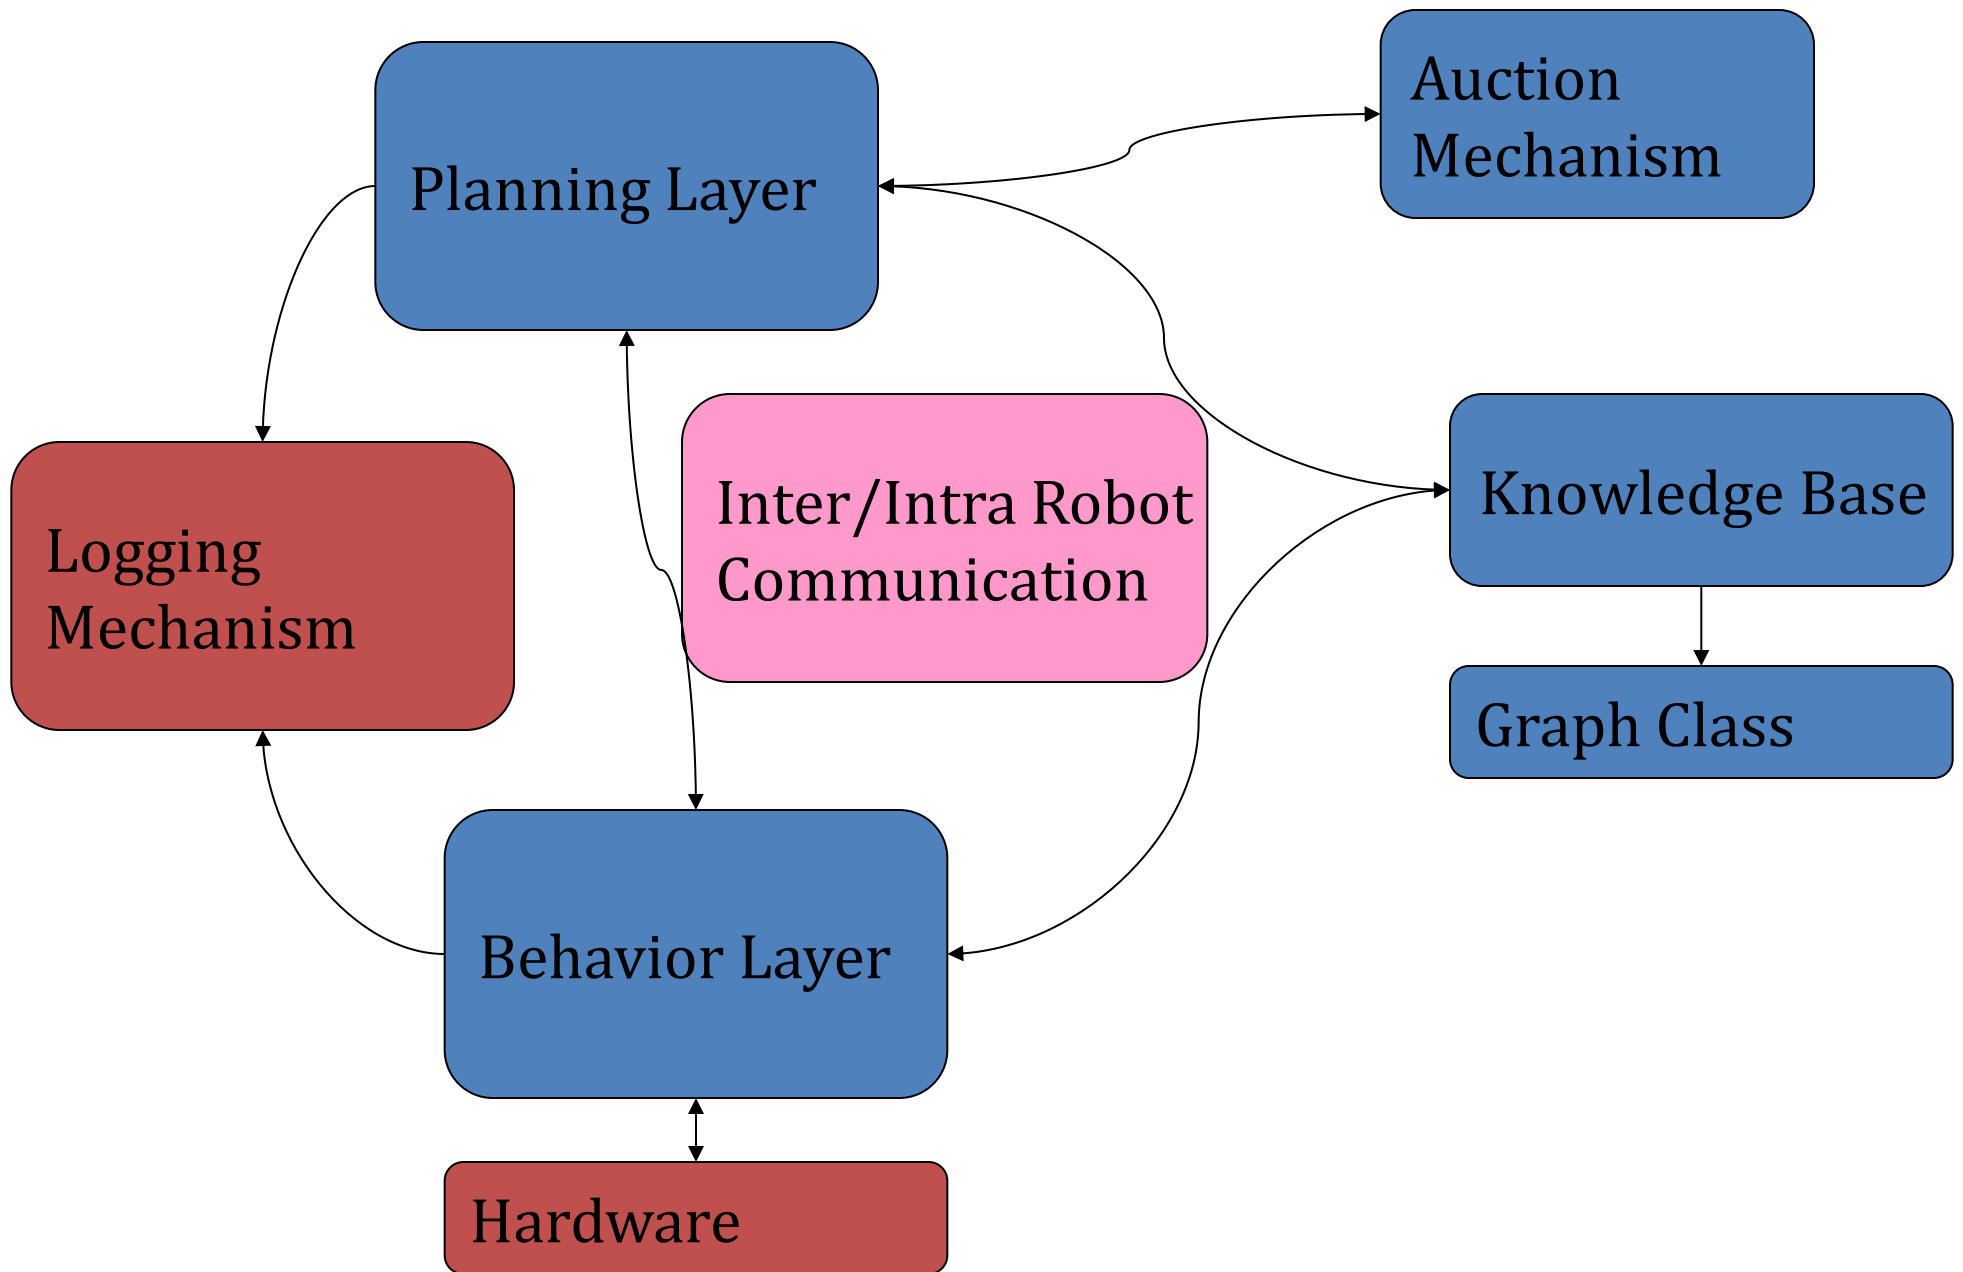

Behaviour Layer Base Loop

