Computation with Absolutely No Space Overhead

Lane Hemaspaandra[1] Proshanto Mukherji[1] Till Tantau[2]

[1]Department of Computer Science
University of Rochester

[2]Fakultät für Elektrotechnik und Informatik
Technical University of Berlin

Developments in Language Theory Conference, 2003

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet



1. Point out that $ is a marker symbol.
2. Stress the larger tape alphabet.

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space

tape

$	0	1	0	0	1	0	$



Turing machine

Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

The Standard Model of Linear Space



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet is larger than input alphabet

Linear Space is a Powerful Model

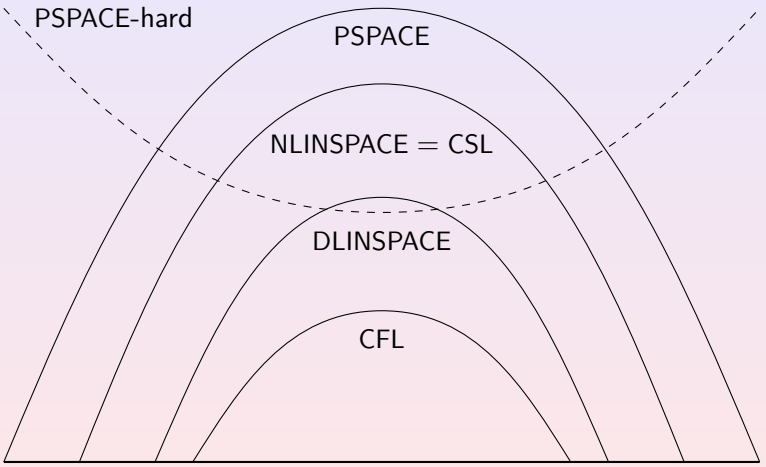

tu-logo

ur-logo



1. Explain CSL.
2. Point out the connections to formal language theory.

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet

Our Model of "Absolutely No Space Overhead"



Characteristics

- Input fills fixed-size tape
- Input may be modified
- Tape alphabet equals input alphabet



1. Point out that no markers are used.

Our Model of "Absolutely No Space Overhead"



Turing machine

Intuition

- Tape is used like a RAM module.

tu-logo

ur-logo

Definition of Overhead-Free Computations

Definition

A Turing machine is overhead-free if

1. it has only a single tape,
2. writes only on input cells,
3. writes only symbols drawn from the input alphabet.

tu-logo

ur-logo

Overhead-Free Computation Complexity Classes

Definition

A language $L \subseteq \Sigma^*$ is in

- DOF if L is accepted by a deterministic overhead-free machine with input alphabet Σ,
- $\mathrm{DOF}_{\mathrm{poly}}$ if L is accepted by a deterministic overhead-free machine with input alphabet Σ in polynomial time.
- NOF is the nondeterministic version of DOF,
- $\mathrm{NOF}_{\mathrm{poly}}$ is the nondeterministic version of $\mathrm{DOF}_{\mathrm{poly}}$.

cu-logo

ur-logo



1. Joke about German pronunciation

Overhead-Free Computation Complexity Classes

Definition

A language $L \subseteq \Sigma^*$ is in

- DOF if L is accepted by a deterministic overhead-free machine with input alphabet Σ,
- $\mathrm{DOF}_{\mathrm{poly}}$ if L is accepted by a deterministic overhead-free machine with input alphabet Σ in polynomial time.
- NOF is the nondeterministic version of DOF,
- $\mathrm{NOF}_{\mathrm{poly}}$ is the nondeterministic version of $\mathrm{DOF}_{\mathrm{poly}}$.

cu-logo

ur-logo

Overhead-Free Computation Complexity Classes

Definition

A language $L \subseteq \Sigma^*$ is in

- DOF if L is accepted by a deterministic overhead-free machine with input alphabet Σ,
- $\mathrm{DOF}_{\mathrm{poly}}$ if L is accepted by a deterministic overhead-free machine with input alphabet Σ in polynomial time.
- NOF is the nondeterministic version of DOF,
- $\mathrm{NOF}_{\mathrm{poly}}$ is the nondeterministic version of $\mathrm{DOF}_{\mathrm{poly}}$.

cu-logo

ur-logo



1. Stress meaning of D and N.

Overhead-Free Computation Complexity Classes

Definition

A language $L \subseteq \Sigma^*$ is in

- DOF if L is accepted by a deterministic overhead-free machine with input alphabet Σ,
- $\mathrm{DOF}_{\mathrm{poly}}$ if L is accepted by a deterministic overhead-free machine with input alphabet Σ in polynomial time.
- NOF is the nondeterministic version of DOF,
- $\mathrm{NOF}_{\mathrm{poly}}$ is the nondeterministic version of $\mathrm{DOF}_{\mathrm{poly}}$.

cu-logo

ur-logo

Simple Relationships among Overhead-Free Computation Classes

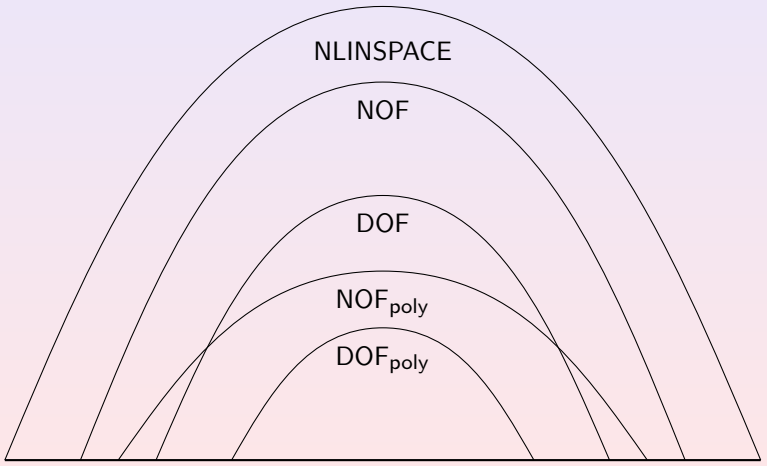

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker



Use 3 minutes.

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Palindromes Can be Accepted in an Overhead-Free Way



Algorithm

Phase 1:
Compare first and last bit
- Place left end marker
- Place right end marker

Phase 2:
Compare bits next to end markers
- Find left end marker
- Advance left end marker
- Find right end marker
- Advance right end marker

Relationships among Overhead-Free Computation Classes

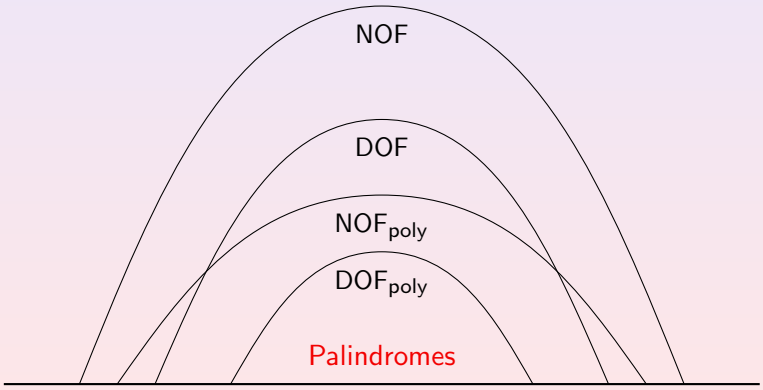

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

A Review of Linear Grammars

Definition

A grammar is linear if it is context-free and
there is only one nonterminal per right-hand side.

Example

$G_1 \colon S \to 00S0 \mid 1$ and $G_2 \colon S \to 0S10 \mid 0$.

Definition

A grammar is deterministic if
"there is always only one rule that can be applied."

Example

$G_1 \colon S \to 00S0 \mid 1$ is deterministic.
$G_2 \colon S \to 0S10 \mid 0$ is not deterministic.

A Review of Linear Grammars

Definition

A grammar is linear if it is context-free and
there is only one nonterminal per right-hand side.

Example

$G_1 \colon S \to 00S0 \mid 1$ and $G_2 \colon S \to 0S10 \mid 0$.

Definition

A grammar is deterministic if
"there is always only one rule that can be applied."

Example

$G_1 \colon S \to 00S0 \mid 1$ is deterministic.
$G_2 \colon S \to 0S10 \mid 0$ is not deterministic.



Just explain intution.

Deterministic Linear Languages Can Be Accepted in an Overhead-Free Way

Theorem

Every deterministic linear language is in $\mathrm{DOF}_{\mathrm{poly}}$.

Metalinear Languages Can Be Accepted in an Overhead-Free Way

Definition

A language is metalinear if it is the concatenation of linear languages.

Example

$\text{TRIPLE-PALINDROME} = \{uvw \mid u, v, \text{ and } w \text{ are palindromes}\}$.

Theorem

Every metalinear language is in NOF_{poly}.

Metalinear Languages Can Be Accepted in an Overhead-Free Way

Definition

A language is metalinear if it is the concatenation of linear languages.

Example

$\text{TRIPLE-PALINDROME} = \{uvw \mid u, v, \text{ and } w \text{ are palindromes}\}$.

Theorem

Every metalinear language is in NOF_{poly}.

Metalinear Languages Can Be Accepted in an Overhead-Free Way

Definition

A language is metalinear if it is the concatenation of linear languages.

Example

TRIPLE-PALINDROME $= \{uvw \mid u, v, \text{ and } w \text{ are palindromes}\}$.

Theorem

Every metalinear language is in $\mathrm{NOF}_{\mathrm{poly}}$.

tu-logo

ur-logo

Relationships among Overhead-Free Computation Classes

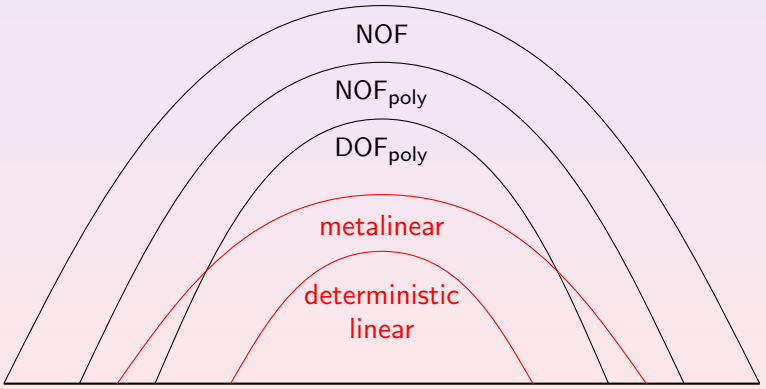

tu-logo

ur-logo



1. Skip next subsection if more than 18 minutes have passed.

Outline

1 The Model of Overhead-Free Computation
- The Standard Model of Linear Space
- Our Model of Absolutely No Space Overhead

2 The Power of Overhead-Free Computation
- Palindromes
- Linear Languages
- Context-Free Languages with a Forbidden Subword
- Languages Complete for Polynomial Space

3 Limitations of Overhead-Free Computation
- Linear Space is Strictly More Powerful

tu-logo

ur-logo

Definition of Almost-Overhead-Free Computations

Definition

A Turing machine is almost-overhead-free if

1. it has only a single tape,
2. writes only on input cells,
3. writes only symbols drawn from the input alphabet plus one special symbol.

tu-logo

ur-logo

Definition of Almost-Overhead-Free Computations

Definition

A Turing machine is almost-overhead-free if

1. it has only a single tape,
2. writes only on input cells,
3. writes only symbols drawn from the input alphabet plus one special symbol.

tu-logo

ur-logo

Definition of Almost-Overhead-Free Computations

Definition

A Turing machine is almost-overhead-free if

1. it has only a single tape,
2. writes only on input cells,
3. writes only symbols drawn from the input alphabet plus one special symbol.

tu-logo

ur-logo

Context-Free Languages with a Forbidden Subword Can Be Accepted in an Overhead-Free Way

Theorem

Let L be a context-free language with a forbidden word.
Then $L \in \mathrm{NOF}_{\mathrm{poly}}$.

Skip proof

Context-Free Languages with a Forbidden Subword Can Be Accepted in an Overhead-Free Way

Theorem

Let L be a context-free language with a forbidden word.
Then $L \in \mathrm{NOF}_{\mathrm{poly}}$.

Proof.

Every context-free language can be accepted by a nondeterministic almost-overhead-free machine in polynomial time. □

tu-logo
ur-logo

Relationships among Overhead-Free Computation Classes

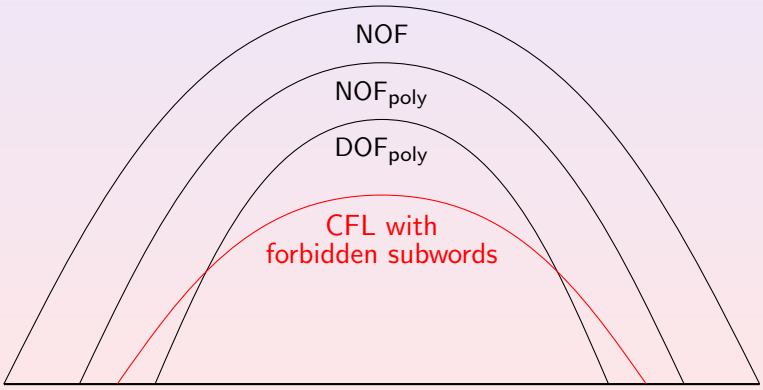

tu-logo

ur-logo

Outline

1. The Model of Overhead-Free Computation
   - The Standard Model of Linear Space
   - Our Model of Absolutely No Space Overhead
2. The Power of Overhead-Free Computation
   - Palindromes
   - Linear Languages
   - Context-Free Languages with a Forbidden Subword
   - Languages Complete for Polynomial Space
3. Limitations of Overhead-Free Computation
   - Linear Space is Strictly More Powerful

tu-logo

ur-logo

Overhead-Free Languages can be PSPACE-Complete

Theorem

DOF *contains languages that are complete for* PSPACE.

▸ Proof details

tu-logo

ur-logo

Relationships among Overhead-Free Computation Classes

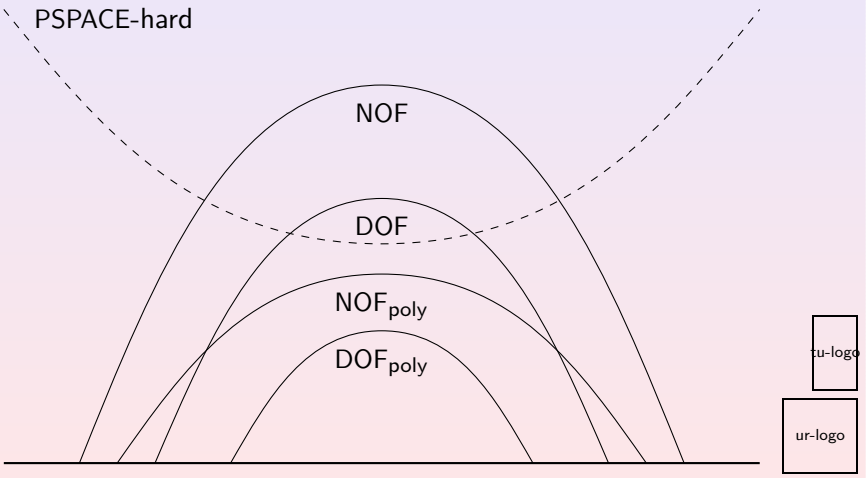

Outline

1 The Model of Overhead-Free Computation
- The Standard Model of Linear Space
- Our Model of Absolutely No Space Overhead

2 The Power of Overhead-Free Computation
- Palindromes
- Linear Languages
- Context-Free Languages with a Forbidden Subword
- Languages Complete for Polynomial Space

3 Limitations of Overhead-Free Computation
- Linear Space is Strictly More Powerful

tu-logo

ur-logo

Some Context-Sensitive Languages Cannot be Accepted in an Overhead-Free Way

Theorem

DOF $\subsetneq$ DLINSPACE.

Theorem

NOF $\subsetneq$ NLINSPACE.

The proofs are based on old diagonalisations due to Feldman, Owings, and Seiferas.

tu-logo

ur-logo

Relationships among Overhead-Free Computation Classes

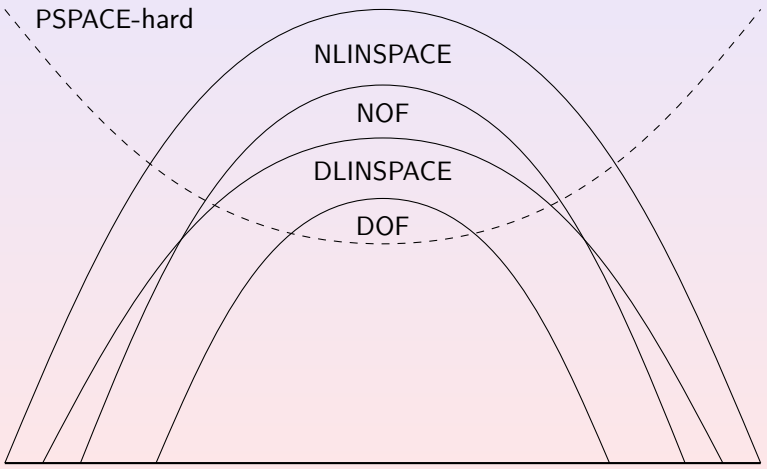

tu-logo

ur-logo

Candidates for Languages that Cannot be Accepted in an Overhead-Free Way

Conjecture

DOUBLE-PALINDROMES $\notin$ DOF.

Conjecture

$\{ww \mid w \in \{0,1\}^*\} \notin$ NOF.

Proving the first conjecture would show DOF $\subsetneq$ NOF.

tu-logo

ur-logo

Candidates for Languages that Cannot be Accepted in an Overhead-Free Way

Theorem

DOUBLE-PALINDROMES $\in$ DOF.

Conjecture

$\{ww \mid w \in \{0,1\}^*\} \notin$ NOF.

Proving the first conjecture would show DOF $\subsetneq$ NOF.

tu-logo

ur-logo

Summary

- Overhead-free computation is a more faithful model of fixed-size memory.
- Overhead-free computation is less powerful than linear space.
- Many context-free languages can be accepted by overhead-free machines.
- We conjecture that all context-free languages are in $\mathrm{NOF}_{\mathrm{poly}}$.
- Our results can be seen as new results on the power of linear bounded automata with fixed alphabet size.

cu-logo

ur-logo



1. Point out result concerning all context-free languages.
2. Relationship to restart automata.

For Further Reading

beamericonbook A. Salomaa.
Formal Languages.
Academic Press, 1973.

beamericonarticle E. Dijkstra.
Smoothsort, an alternative for sorting in situ.
Science of Computer Programming, 1(3):223–233, 1982.

beamericonarticle E. Feldman and J. Owings, Jr.
A class of universal linear bounded automata.
Information Sciences, 6:187–190, 1973.

beamericonarticle P. Jančar, F. Mráz, M. Plátek, and J. Vogel.
Restarting automata.
FCT Conference 1995, LNCS 985, pages 282–292. 1995.

tu-logo

ur-logo

For Further Reading

beamericonbook A. Salomaa.
Formal Languages.
Academic Press, 1973.

beamericonarticle E. Dijkstra.
Smoothsort, an alternative for sorting in situ.
Science of Computer Programming, 1(3):223–233, 1982.

beamericonarticle E. Feldman and J. Owings, Jr.
A class of universal linear bounded automata.
Information Sciences, 6:187–190, 1973.

beamericonarticle P. Jančar, F. Mráz, M. Plátek, and J. Vogel.
Restarting automata.
FCT Conference 1995, LNCS 985, pages 282–292. 1995.

tu-logo

ur-logo

For Further Reading

beamericonbook A. Salomaa.
Formal Languages.
Academic Press, 1973.

beamericonarticle E. Dijkstra.
Smoothsort, an alternative for sorting in situ.
Science of Computer Programming, 1(3):223–233, 1982.

beamericonarticle E. Feldman and J. Owings, Jr.
A class of universal linear bounded automata.
Information Sciences, 6:187–190, 1973.

beamericonarticle P. Jančar, F. Mráz, M. Plátek, and J. Vogel.
Restarting automata.
FCT Conference 1995, LNCS 985, pages 282–292. 1995.

tu-logo

ur-logo

For Further Reading

beamericonbook A. Salomaa.
Formal Languages.
Academic Press, 1973.

beamericonarticle E. Dijkstra.
Smoothsort, an alternative for sorting in situ.
Science of Computer Programming, 1(3):223–233, 1982.

beamericonarticle E. Feldman and J. Owings, Jr.
A class of universal linear bounded automata.
Information Sciences, 6:187–190, 1973.

beamericonarticle P. Jančar, F. Mráz, M. Plátek, and J. Vogel.
Restarting automata.
FCT Conference 1995, LNCS 985, pages 282–292. 1995.

tu-logo

ur-logo

Appendix Outline

4 Appendix
- Complete Languages
- Improvements for Context-Free Languages
- Abbreviations

tu-logo

ur-logo

Overhead-Free Languages can be PSPACE-Complete

Theorem

DOF *contains languages that are complete for* PSPACE.

Proof.

1. Let $A \in$ DLINSPACE be PSPACE-complete.
   Such languages are known to exist.
2. Let M be a linear space machine that accepts $A \subseteq \{0,1\}^*$ with tape alphabet Γ.
3. Let $h\colon \Gamma \to \{0,1\}^*$ be an isometric, injective homomorphism.
4. Then $h(L)$ is in DOF and it is PSPACE-complete. □

tu-logo

Return

ur-logo

Improvements

Theorem

1. $\mathrm{DCFL} \subseteq \mathrm{DOF}_{\mathrm{poly}}$.
2. $\mathrm{CFL} \subseteq \mathrm{NOF}_{\mathrm{poly}}$.

tu-logo

ur-logo

Explanation of Different Abbreviations

DOF	Deterministic Overhead-Free.
NOF	Nondeterministic Overhead-Free.
$\mathrm{DOF}_{\mathrm{poly}}$	Deterministic Overhead-Free, polynomial time.
$\mathrm{DOF}_{\mathrm{poly}}$	Nondeterministic Overhead-Free, polynomial time.

Table: Explanation of what different abbreviations mean.

tu-logo

ur-logo